

# NFS-320 Panel de control de alarma contra incendios direccionable inteligente

## General

El panel de control de alarma contra incendios inteligente NFS-320 es parte de la serie ONYX® de controles de alarma contra incendios de NOTIFIER.

En configuraciones independientes o en red, los productos de la serie ONYX cumplen prácticamente todos los requisitos de las aplicaciones.

El diseño modular del NFS-320 facilita la planificación del sistema. El panel se puede configurar con solo unos pocos dispositivos para aplicaciones de edificios pequeños o conectarse en red con muchos dispositivos para proteger un campus grande o un bloque de oficinas de gran altura. Simplemente agregue equipo periférico adicional para adaptarse a la aplicación. Se puede agregar protección inalámbrica contra incendios con la puerta de enlace y los dispositivos inalámbricos SWIFT.

Para instalaciones que utilizan NFS-320C, se puede montar un anunciador serie ACM opcional en el mismo gabinete (hasta 48 zonas/puntos, pedir por separado; consulte DN-60085).

NOTA: A menos que se indique con una "R", "C" o "E" específica de la versión al final del número de pieza, "NFS-320" se refiere a los modelos NFS-320, NFS-320R, NFS-320C y NFS-320E.

Los paneles de la serie ONYX® se integran con la plataforma Connected Life Safety Services (CLSS) a través de CLSS Gateway, proporcionando conectividad a la estación central, la nube y aplicaciones móviles. (Consulte HON-62034.) Esta funcionalidad basada en la nube proporciona protección confiable y monitoreo remoto del sistema, entrada manual de datos reducida e informes.

## Features

- Certificado para aplicaciones sísmicas cuando se utiliza con el kit de montaje sísmico adecuado.
- Aprobado para aplicaciones marinas cuando se utiliza con equipos compatibles listados. Ver DN-60688.
- Un circuito de línea de señalización inteligente (SLC) aislado Clase A, B o X.
- Protección inalámbrica contra incendios mediante la tecnología SWIFT Smart Wireless Integrated Fire. Ver DN-60820.
- Hasta 159 detectores y 159 módulos por SLC; 318 dispositivos como máximo.
- – Los detectores pueden ser cualquier combinación de foto, térmico o multisensor; Hay detectores inalámbricos disponibles para su uso con el FWGS(A).
- – Los módulos incluyen estaciones manuales direccionables, dispositivos de contacto normalmente abiertos, detectores de humo de dos cables, notificación o relé; Hay módulos inalámbricos disponibles para su uso con el FWGS(A).
- Pantalla estándar de 80 caracteres.
- Opciones de red:
  - – Red de alta velocidad para hasta 200 nodos (N16e/x, NFS2-3030, NFS2-640, NFS-320(C), NFS-320SYS, NCD, NCA-2, DVC-EM, ONYXWorks, NFS-3030, NFS-640 y NCA).
  - – Red estándar para hasta 103 nodos (N16e/x, NFS2-3030, NFS2-640, NFS-320(C), NFS-320SYS, NCD, NCA-2, DVC-EM, ONYXWorks, NCS, NFS-3030, NFS-640, NCA, AFP-200, AFP-300/400, AFP-1010 y AM2020). Hasta 54 nodos cuando se utiliza DVC-EM en paginación de red.
- Fuente de alimentación de 6,0 A con cuatro circuitos de aparatos de notificación (NAC) integrados Clase A/B. Sincronización seleccionable de sensor de sistema, Wheelock o luz estroboscópica Gentex.
- Relés integrados de alarma, problema, seguridad y supervisión.
- Utilidad de programación en línea o fuera de línea de VeriFire® Tools. Cargar/Descargar, guardar, almacenar, verificar, comparar y simular bases de datos de paneles. Actualizar el firmware del panel.
- Informes de autoprogramación y prueba de caminata.



- Múltiples opciones de comunicación con la estación central:
  - – UDACT estándar
  - – Internet
  - – Internet/GSM
- Anunciadores remotos de 80 caracteres (hasta 32).
- Anunciadores EIA-485, incluidos gráficos personalizados.
- Interfaz de impresora (impresoras de 80 y 40 columnas).
- Archivo de historial con capacidad para 800 eventos en memoria no volátil, más un archivo separado de solo alarmas de 200 eventos.
- Selección de Verificación de Alarmas por punto, con contador automático.
- Preseñal/Secuencia de Alarma Positiva (PAS).
- Opciones de inhibición de silencio y temporizador de silencio automático.
- Funciones de codificación NAC:
  - – Hora de marzo.
  - – Temporales.
  - – Codificación de dos etapas de California.
  - – Canadiense de dos etapas.
  - – Sincronización estroboscópica.
- Conectividad en la nube opcional para monitoreo remoto fuera del sitio a través de CLSS (consulte HON-62034)
- Supervise varios edificios a través de una estación central fuera del campus e informe a través de CLSS Gateway
- Programación remota opcional a través de CLSS
- Programable en campo en el panel o en la PC con el programa VeriFire® Tools para verificar, comparar y simular.
- Teclado QWERTY completo.
- El cargador de batería admite baterías de 18 a 200 AH.
- Puntos sin alarma para funciones de menor prioridad.
- ACK remoto/Silencio de señal/Reinicio del sistema/Drill a través de módulos de monitor.
- Funciones de control horario automático, con excepción de festivos.
- Amplia protección transitoria incorporada.
- Potentes ecuaciones lógicas booleanas.

**SWIFT WIRELESS**

- Self-healing mesh wireless protocol.
- Each SWIFT Gateway supports up to 49 SWIFT devices.
- Up to 4 wireless gateways can be installed with overlapping network coverage.

**RELEASING FEATURES**

- Ten independent hazards.
- Sophisticated cross-zone (three options).
- Delay timer and Discharge timers (adjustable).
- Abort (four options).
- Low-pressure CO<sub>2</sub> listed.

**VOICE FEATURES**

- Integrates with FirstCommand Series. See DN-60772.
- Telephone applications require NFC-FFT.

**HIGH-EFFICIENCY OFFLINE SWITCHING**

**3.0 A POWER SUPPLY (6.0 A IN ALARM)**

- 120 VAC (NFS-320/NFS-320C); 240 VAC (NFS-320E).
- Displays battery current/voltage on panel (with display).

**FLASHSCAN® INTELLIGENT FEATURES**

- Polls up to 318 devices in less than two seconds.
- Activates up to 159 outputs in less than five seconds.
- Multicolor LEDs blink device address during Walk Test.
- Fully digital, high-precision protocol (U.S. Patent 5,539,389).
- Manual sensitivity adjustment — up to nine levels.
- Pre-alarm ONYX intelligent sensing — up to nine levels.
- Day/Night automatic sensitivity adjustment.
- Sensitivity levels:
  - **Photo** – 0.5 to 2.35%/foot obscuration.

- **High-Sensitivity Photoelectric (VIEW®)** – Open Air Protection (0.5% - 2.0%/ft. obscuration), Special Applications (0.02%-0.5%/ft. obscuration)
- **Multi-Criteria Detector** – Open Air Protection (2.52-3.89%/ft. obscuration), Special Applications (1.13-2.52%/ft. obscuration)
- Drift compensation (U.S. Patent 5,764,142).
- Degraded mode: In the unlikely event that the NFS-320's primary microprocessor fails, FlashScan detectors revert to degraded operation and can activate the control panel's NAC circuits and alarm relay. Each of the four built-in panel circuits includes a Disable/Enable switch for this feature.
- Multi-detector algorithm involves nearby detectors in alarm decision (U.S. Patent 5,627,515).
- Automatic detector sensitivity testing (NFPA-72 compliant).
- Maintenance alert (two levels).
- Self-optimizing pre-alarm.


**FSV-951 SERIES VIEW® (VERY INTELLIGENT EARLY WARNING)**

**HIGH-SENSITIVITY SMOKE DETECTOR**

- Advanced ONYX intelligent sensing algorithms differentiate between smoke and non-smoke signals.
- Addressable operation pinpoints the fire location.
- Ivory models (-IV) support CLIP mode as well as FlashScan.
- ULC listed models available; "A" models are ULC Listed.
- -R is retrofit, backwards compatible for use with older panels.

**FCO-951-IV ADVANCED MULTI-CRITERIA FIRE/CO DETECTOR**

- Detects all four major elements of a fire (smoke, heat, CO, and flame).
- 135°F (57.2°C) fixed-temperature heat detector.
- Transmits an alarm signal due to heat.
- Separate signal for life-safety CO detection.

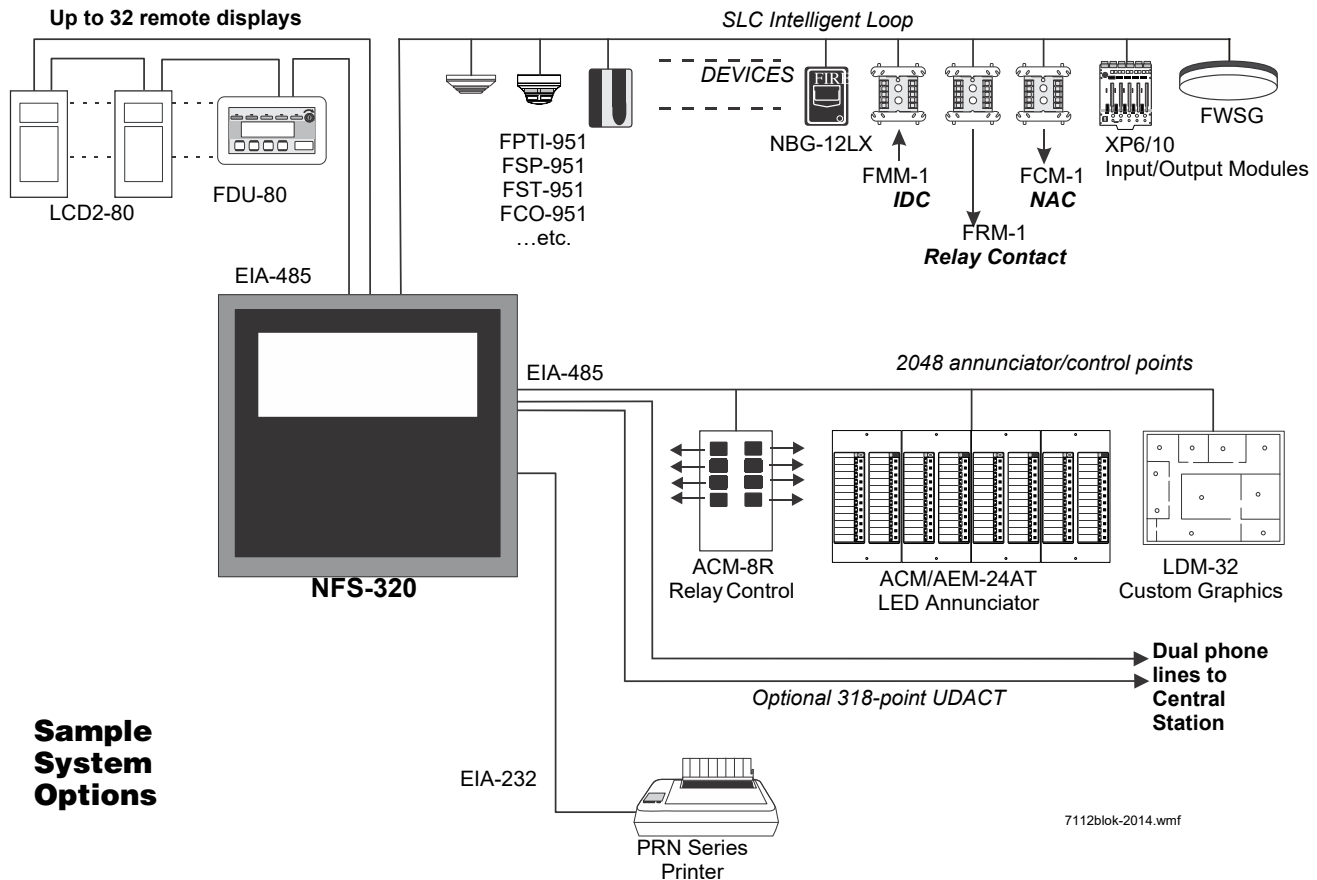

7112blok-2014.wmf

- Optional addressable sounder base for Temp-3 (fire) or Temp-4 (CO) tone.
- Automatic drift compensation of smoke sensor and CO cell.
- High nuisance-alarm immunity.
- ULC listed models available; -A models are ULC Listed.

#### **FPTI-951(A) INTELLIGENT MULTI-CRITERIA DETECTOR**

- Combined photoelectric, thermal, and infrared sensor
- UL 268 7th Edition and UL 521 Listed; Canadian models CAN/ULC S529 and CAN/ULC S530
- Microprocessor-based technology; combination photo, thermal, and infrared technology.

#### **FPC-951(A) PHOTOELECTRIC/CO SENSOR**

- Combined photoelectric and carbon monoxide sensor

#### **FSCO-95(A) INTELLIGENT CO SENSOR**

- Carbon monoxide sensor

#### **FS-OSI-RI(A) ADDRESSABLE INTELLIGENT SINGLE-ENDED BEAM SMOKE DETECTOR**

- Intelligent addressable reflector-type linear optical beam smoke detector
- Fast, easy, and intuitive beam alignment indicated by directional LED arrows
- Long range coverage of 16-328 ft (5-100 m) is standard; no separate long-range kit required

#### **INTELLIGENT VESDA-E DETECTORS**

- Intelligent aspiration smoke detectors connect directly to the SLC loop of compatible ONYX® Series panels:
  - VEA-040-A00-NTF, VEA-040-A10-NTF
  - VEP-A00-P-NTF, VEP-A10-P-NTF, VEP-A00-1P-NTF
  - VEU-A00-NTF, VEU-A10-NTF
  - VES-A00-P-NTF-UL, VES-A10-P-NTF-UL
- Models offer LED display, LCD display, or both
- Coverage options for spaces up to 69,965 square feet

### **FlashScan, Exclusive World-Leading Detector Protocol**

At the heart of the NFS-320 is a set of detection devices and device protocol — FlashScan (U.S. Patent 5,539,389). FlashScan is an all-digital protocol that gives superior precision and high noise immunity.

In addition to providing quick identification of an active input device, this protocol can also activate many output devices in a fraction of the time required by competitive protocols. This high speed also allows the NFS-320 to have the largest device per loop capacity in the industry — 318 points — yet every input and output device is sampled in less than two seconds. The microprocessor-based FlashScan detectors have bicolor LEDs that can be coded to provide diagnostic information, such as device address during Walk Test.

### **ONYX Intelligent Sensing**

Intelligent sensing is a set of software algorithms that provides the NFS-320 with industry-leading smoke detection capability. These complex algorithms require many calculations on each reading of each detector, and are made possible by the high-speed microcomputer used by the NFS-320.

**Drift Compensation and Smoothing:** Drift compensation allows the detector to retain its original ability to detect actual smoke, and resist false alarms, even as dirt accumulates. It reduces maintenance requirements by allowing the system to automatically perform the periodic sensitivity measurements required by NFPA 72.

Smoothing filters are also provided by software to remove transient noise signals, such as those caused by electrical interference.

**Maintenance Warnings:** When the drift compensation performed for a detector reaches a certain level, the performance of the detector may be compromised, and special warnings are given. There are three warning levels: (1) Low Chamber value; (2) Maintenance Alert, indicative of dust accumulation that is near but below the allowed limit; (3) Maintenance Urgent, indicative of dust accumulation above the allowed limit.

**Sensitivity Adjust:** Nine sensitivity levels are provided for alarm detection. These levels can be set manually, or can change automatically between day and night. Nine levels of pre-alarm sensitivity can also be selected, based on predetermined levels of alarm. Pre-alarm operation can be latching or self-restoring, and can be used to activate special control functions.

**Self-Optimizing Pre-Alarm:** Each detector may be set for “Self-Optimizing” pre-alarm. In this special mode, the detector “learns” its normal environment, measuring the peak analog readings over a long period of time, and setting the pre-alarm level just above these normal peaks.

**Cooperating Multi-Detector Sensing:** A patented feature of ONYX intelligent sensing is the ability of a smoke sensor to consider readings from nearby sensors in making alarm or pre-alarm decisions. Without statistical sacrifice in the ability to resist false alarms, it allows a sensor to increase its sensitivity to actual smoke by a factor of almost two to one.

### **Field Programming Options**

**Autoprogram** is a timesaving feature. The FACP “learns” what devices are physically connected and automatically loads them in the program with default values for all parameters. Requiring less than one minute to run, this routine allows the user to have almost immediate fire protection in a new installation, even if only a portion of the detectors are installed.

**Keypad Program Edit (with KDM-R2)** The NFS-320, like all NOTIFIER intelligent panels, has the exclusive feature of program creation and editing capability from the front panel keypad, while continuing to provide fire protection. The architecture of the NFS-320 software is such that each point entry carries its own program, including control-by-event links to other points. This allows the program to be entered with independent per-point segments, while the NFS-320 simultaneously monitors other (already installed) points for alarm conditions.

**VeriFire® Tools** is an offline programming and test utility that can greatly reduce installation programming time, and increase confidence in the site-specific software. It is Windows®-based and provides technologically advanced capabilities to aid the installer. The installer may create the entire program for the NFS-320 in the comfort of the office, test it, store a backup file, then bring it to the site and download from a laptop into the panel.

### **Placement of Equipment in Chassis and Cabinet**

The following guidelines outline the NFS-320’s flexible system design.

**Wiring:** When designing the cabinet layout, consider separation of power-limited and non-power-limited wiring as discussed in the *NFS-320 Installation Manual*.

It is critical that all mounting holes of the NFS-320 are secured with a screw or standoff to ensure continuity of Earth Ground.

**Networking:** If networking two or more control panels, each unit requires a Network Communication Module or High-Speed Network Communication Module (HS-NCM can support two nodes; see “Networking Options” on page 4). These modules can be installed in any

option board position (see manual), and additional option boards can be mounted in front of them.

## KDM-R2 Controls and Indicators

**Program Keypad:** QWERTY type (keyboard layout).

**12 LED Indicators:** Power; Fire Alarm; Pre-Alarm; Security; Supervisory; System Trouble; Signals Silenced; Points Disabled; Control Active; Abort; Pre-Discharge; Discharge.

**Keypad Switch Controls:** Acknowledge/Scroll Display; Signal Silence; Drill; System Reset; Lamp Test.

**LCD Display:** 80 characters (2 x 40) with long-life LED backlight.

## Product Line Information

- “Configuration Guidelines” on page 4
- “Main System Components” on page 4
- “Networking Options” on page 4
- “Auxiliary Power Supplies and Batteries” on page 4
- “Audio Options” on page 4
- “Compatible Devices, EIA-232 Ports” on page 4
- “Compatible Devices, EIA-485 Ports” on page 4
- “Compatible Intelligent Devices” on page 5
- “Enclosures, Chassis, and Dress Plates” on page 6
- “Other Options” on page 6

### CONFIGURATION GUIDELINES

The NFS-320 system ships assembled; description and some options follow. See “Enclosures, Chassis, and Dress Plates” on page 6 for information about mounting peripherals.

Stand-alone and network systems require a main display. On stand-alone systems, the panel’s keypad provides the required display. On network systems (two or more networked fire panel nodes), at least one NCD, NCA-2/C, NCS, or ONYXWorks annunciation device is required. (For NCA-2, see DN-7047. For NCD, see DN-60974.)

### MAIN SYSTEM COMPONENTS

**NFS-320:** The standard, factory-assembled NFS-320 system includes the following components: one control panel mounted on chassis (120 V operation — ships with grounding cable, battery interconnect cables, and document kit); includes integral power supply mounted to the main circuit board; one primary display KDM-R2 keypad/display; and one cabinet for surface or semi-flush mounting. Purchase batteries separately. One or two option boards may be mounted inside the NFS-320 cabinet; additional option boards can be used in remote cabinets. (Non-English versions also available. NFS-320-SP, NFS-320-PO.)

**NFS-320R:** Same as NFS-320, but in red enclosure.

**NFS-320C:** Based on NFS-320 above. NFS-320C supports installation of an optional ACM-series annunciator in the same cabinet. UL- and ULC-listed. (Non-English version also available: NFS-320C-FR.) For NFS-320C, see DN-60085.

**NFS-320CR:** Same as NFS-320C but in a red enclosure. For NFS-320C, see DN-60085.

**NFS-320E:** Same as NFS-320, but with 240 V operation. (Non-English versions also available. NFS-320E-SP, NFS-320E-PO.)

**TR-320:** Trim ring for the NFS-320 cabinet.

### NETWORKING OPTIONS

**NCM-W, NCM-F:** Standard Network Communications Modules. Wire and multi-mode fiber versions available. See DN-6861.

**HS-NCM-W(-2), HS-NCM-MF, HS-NCM-SF, HS-NCM-WMF(-2), HS-NCM-WSF(-2), HS-NCM-MFSF:** High-speed Network Communications Modules. Wire, single-mode fiber, multi-mode fiber, and media conversion models are available. See DN-60454.

**RPT-W, RPT-F, RPT-WF:** Standard-network repeater board with wire connection (RPT-W), multi-mode fiber connection (RPT-F), or allowing a change in media type between wire and fiber (RPT-WF). Not used with high-speed networks. See DN-6971.

**ONYXWorks:** UL-listed graphics PC workstation, software, and computer hardware. See DN-7048 for specific part numbers.

**NFN-GW-EM-3:** NFN Gateway, embedded. See DN-60499.

**NWS-3:** NOTI•FIRE•NET™ Web Server. See DN-6928.

**CAP-GW:** Common Alerting Protocol Gateway. See DN-60756.

**VESDA-HLI-GW:** VESDAnet high-level interface gateway. See DN-60753.

**LEDSIGN-GW:** UL-listed sign gateway. Interfaces with classic and high-speed NOTI•FIRE•NET networks through the NFN Gateway. See DN-60679.

**OAX2-24V:** UL-listed LED sign, used with LEDSIGN-GW. See DN-60679.

### AUXILIARY POWER SUPPLIES AND BATTERIES

**ACPS-610:** 6.0 A or 10.0 A addressable charging power supply. See DN-60244.

**APS2-6R:** Auxiliary Power Supply. Provides up to 6.0 amperes of power for peripheral devices. Includes battery input and transfer relay, and overcurrent protection. Mounts on two of four positions on a CHS-4L or CHS-4 chassis. See DN-5952.

**FCPS-24S6/S8:** Remote 6 A and 8 A power supplies with battery charger. See DN-6927.

**BAT Series:** Batteries. NFS-320 uses two 12 volt, 18 to 200 AH batteries. See DN-6933.

### AUDIO OPTIONS

**NFC-50/100:** 25 watt, 25 VRMS, emergency Voice Evacuation Control Panel (VECP) with integral commercial microphone, digital message generator, and Class A or Class B speaker circuits. See DN-60772.

### COMPATIBLE DEVICES, EIA-232 PORTS

**PRN-7:** 80-column printer. See DN-60897.

**VS4095/5:** Printer, 40-column, 24 V. Mounted in external backbox. See DN-3260.

**DPI-232:** Direct Panel Interface, specialized modem for extending serial data links to remotely located FACPs and/or peripherals; mount on NFS-320 chassis. See DN-6870.

### COMPATIBLE DEVICES, EIA-485 PORTS

**ACM-24AT:** ONYX Series ACS annunciator – 24 points, expandable to 64 of annunciation with Alarm or Active LED, Trouble LED, and switch per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) by point to be red, green, or yellow; the Trouble LED is always yellow. See DN-6862.

**AEM-24AT:** Same LED and switch capabilities as ACM-24AT, expands the ACM-24AT to 48, 72, or 96 points. See DN-6862.

**ACM-48A:** ONYX Series ACS annunciator – 48 points, expandable to 64 of annunciation with Alarm or Active LED per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) in groups of 24 to be red, green, or yellow. See DN-6862.

**AEM-48A:** Same LED capabilities as ACM-48A, expands the ACM-48A to 96 points. See DN-6862.

**ACM-8R:** Remote Relay Module with eight Form-C contacts. Can be located up to 6,000 ft. (1828.8 m) from panel on four wires. See DN-3558.

**FDU-80:** Terminal mode. 80-character, backlit LCD display. Mounts up to 6,000 ft. (1828.8 m) from panel. Up to 32 per FACP. See DN-6820.

**LCD2-80:** Terminal and ACS mode. 80-character, backlit LCD display. Mounts up to 6,000 ft. (1828.8 m) from panel. Up to 32 per FACP. See DN-60548.

**LDM:** Lamp Driver Modules LDM-32, LDM-E32, and LDM-R32; remote custom driver modules. See DN-0551.

**SCS:** Smoke control stations SCS-8, SCE-8, with lamp drivers SCS-8L, SCE-8L; eight (expandable to 16) circuits (HVAC only). See DN-4818.

**TM-4:** Transmitter Module. Includes three reverse-polarity circuits and one municipal box circuit; mount on NFS-320 chassis or remotely. See DN-6860.

**UDACT-2:** Universal Digital Alarm Communicator Transmitter, 636 channel. See DN-60686.

**UZC-256:** Programmable Universal Zone Coder provides positive non-interfering successive zone coding. Microprocessor-controlled, field-programmable from IBM®-compatible PCs (requires optional programming kit). Mounts in **BB-UZC**. See DN-3404.

#### COMPATIBLE INTELLIGENT DEVICES

**NOTE:** "A" suffix indicates ULC-Listed model:

**FWSG(A) Wireless SWIFT Gateway:** Addressable gateway supports wireless SLC devices. Order FWSGA for ULC applications. See DN-60820.

**FCO-951/IV** FlashScan, Addressable intelligent multi-criteria smoke sensors, photo, carbon monoxide, fixed temperature heat detector and infra-red (IR). ULC: FCO-951A/IV

**FPC-951.** FlashScan, Combined photoelectric and carbon monoxide sensor. ULC: FPC-951A.

**FSCO-951.** FlashScan, Addressable carbon monoxide sensor. ULC: FSCO-951A.

**FPTI-951, FPTI-951-IV:** Addressable intelligent multi-criteria photoelectric, thermal and IR sensors. ULC: FPTI-951A, FPTI-951A-IV.

**FS-OSI-RI** Addressable intelligent single-ended beam smoke detector. ULC: FS-OSI-RIA.

**FSP-951:** White, low-profile intelligent photoelectric sensor, FlashScan only. ULC: FSP-951A.

**FSP-951-IV:** Ivory, low-profile intelligent photoelectric sensor. ULC: FSP-951A-IV

**FSP-951T:** White, same as FSP-951 but includes a built-in 135°F (57°C) fixed-temperature thermal device. FlashScan only. ULC: FSP-951TA.

**FSP-951T-IV:** Ivory, same as FSP-951T but includes a built-in 135°F (57°C) fixed-temperature thermal device. ULC: FSP-951TA-IV.

**FSP-951R:** White, low-profile intelligent photoelectric sensor, remote test capable. For use with DNR/DNRW. FlashScan only. ULC: FSP-951RA

**FSP-951R-IV:** Ivory, low-profile intelligent photoelectric sensor, remote test capable. FlashScan only. ULC: FSP-951RA-IV, for use with DNRA.

**FST-951:** White, low-profile intelligent 135°F fixed thermal sensor, FlashScan only. Must be mounted to one of the bases listed below. ULC: FST-951A. See DN-60975.

**FST-951-IV:** Ivory, low-profile intelligent 135°F fixed thermal sensor, FlashScan and CLIP. Must be mounted to one of the bases listed below. ULC: FST-951A-IV.

**FST-951R:** White, low-profile intelligent rate-of-rise thermal sensor, FlashScan only. Must be mounted to one of the bases listed below. ULC: FST-951A

**FSP-951R-IV:** Ivory, low-profile intelligent photoelectric sensor, remote test capable. FlashScan only. ULC: FSP-951RA-IV, for use with DNRA.

**FST-951H:** White, low-profile intelligent 190°F fixed thermal sensor, FlashScan only. Must be mounted to one of the bases listed below. ULC: FST-951HA.

**FST-951H-IV:** Ivory, low-profile intelligent 190°F thermal sensor, FlashScan and CLIP. Must be mounted to one of the bases listed below. ULC: FST-951HA-IV.

**FSV-951, FSV-951R:** White, intelligent high-sensitivity photoelectric smoke detector. ULC: FSV-951A, FSV-951RA

**FSV-951-IV, FSV-951R-IV:** Ivory, intelligent high-sensitivity photoelectric smoke detector. ULC: FSV-951A-IV, FSV-951RA-IV.

**VEP-A00-P-NTF:** Intelligent aspiration smoke detector with LED display, 4 pipes, covers up to 21,520 square feet. See DN-61029. UL/ULC Listed.

**VEP-A10-P-NTF:** Intelligent aspiration smoke detector with LED and LCD display, 4 pipes, covers up to 21,520 square feet. See DN-61029. UL/ULC Listed.

**VEP-A00-1P-NTF:** Intelligent aspiration smoke detector with LED display, single pipe, covers up to 10,760 square feet. See DN-61029. UL/ULC Listed.

**VEU-A00-NTF:** Intelligent aspiration smoke detector with LED display, 4 pipes, covers up to 69,965 square feet. See DN-61034. UL/ULC Listed.

**VEU-A10-NTF:** Intelligent aspiration smoke detector with LED and LCD display, 4 pipes, covers up to 69,965 square feet. See DN-61034. UL/ULC Listed.

**VEA-040-A00-NTF:** Intelligent aspiration with LED display, 40 point-addressable detection points. Covers 36,000 square feet. See DN-61036. UL/ULC Listed.

**VEA-040-A10-NTF:** Intelligent aspiration with LED and LCD display, 40 point-addressable detection points. Covers 36,000 square feet. See DN-61036. UL/ULC Listed.

**VES-A00-P-NTF-UL:** Intelligent scanning aspiration detector with LEDs. See DN-62040. UL 268 7th edition.

**VES-A10-P-NTF-UL:** Intelligent scanning aspiration detector with 3.5" display. See DN-62040. UL 268 7th edition.

**DNR:** InnovairFlex low-flow non-relay duct-detector housing. ULC: DNRA. (Order FSP-951R(A) separately.) See DN-60429.

**DNRW:** Same as above with NEMA-4 rating, watertight. See DN-60429.

**B224RB-WH:** White, low-profile relay base. See DN-60054. ULC: B224RBA-WH.

**B224RB-IV:** Ivory, plug-in System Sensor relay base. ULC: B224RBA-IV.

**B224BI-WH:** White, isolator base for low-profile detectors. See DN-60054. ULC: B224BIA-WH.

**B224BI-IV:** Ivory isolator detector base. ULC: B224BIA-IV.

**B300-6:** White, standard flanged low-profile mounting base. (For 10-pack order B300-6-BP.) ULC: B300A-6.

**B300-6-IV:** Ivory, standard flanged low-profile mounting base. ULC: B300A-6-IV.

**B501-WHITE:** European-style, 4" (10.16 cm) base. See DN-60054. (For 10-pack order B501-WHITE-BP.) UL/ULC listed.

**B501-BL:** Black, 4" standard European flangeless mounting base. UL/ULC listed.

**B501-IV:** Ivory color, 4" standard European flangeless mounting base. UL/ULC listed.

**B200S-WH:** White, intelligent programmable sounder base, capable of producing a variety of tone patterns including ANSI Temporal 3. Compatible with synchronization protocol. See DN-60054. ULC: B200SA-WH.

**B200S-IV:** Ivory intelligent, programmable sounder base. ULC: B200SA-IV.

**B200SCOA-WH:** White intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO detectors. Based on B200SA. ULC listed.

**B200SCOA-IV:** Ivory intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO detectors. Based on B200SA. ULC listed.

**B200S-LF-WH:** White, low-frequency version of B200S. See DN-60054.

**B200S-LF-IV:** Ivory, low-frequency version of B200S.

**B200SR-WH:** White intelligent programmable sounder base, Temporal 3 or Continuous tone. For retrofit installations replacing B501BH series bases. See DN-60054. ULC: B200SRA-WH.

**B200SR-IV:** Ivory intelligent programmable sounder base, Temporal 3 or Continuous tone. For retrofit installations replacing B501BH series bases. ULC: B200SRA-IV.

**B200SR-LF-WH:** White, low-frequency version of B200SR. See DN-60054.

**B200SR-LF-IV:** Ivory, low-frequency version of B200SR.

**FMM-1:** FlashScan monitor module. See DN-6720.

**FDM-1(A):** FlashScan dual monitor module. See DN-6720.

**FZM-1(A):** FlashScan two-wire detector monitor module. See DN-6720.

**FMM-101(A):** FlashScan miniature monitor module. See DN-6720.

**FCM-1(A):** FlashScan control module. See DN-6724.

**FCM-1-REL(A):** FlashScan releasing control module. See DN-60390.

**FRM-1(A):** FlashScan relay module. See DN-6724.

**FDRM-1(A):** FlashScan dual monitor/dual relay module. See DN-60709.

**NBG-12LX:** Manual pull station, addressable. See DN-6726.

**N-MPS series:** Manual pull stations, addressable and conventional. For use in Canada only. See DN-5497 and DN-60629.

**ISO-X(A):** Isolator module. See DN-2243.

**ISO-6(A):** Six fault isolator module. See DN-60844.

**XP6-C(A):** FlashScan six-circuit supervised control module. See DN-6924.

**XP6-MA(A):** FlashScan six-zone interface module; connects intelligent alarm system to two-wire conventional detection zone. See DN-6925.

**XP6-R(A):** FlashScan six-relay (Form-C) control module. See DN-6926.

**XP10-M(A):** FlashScan ten-input monitor module. See DN-6923.

#### **ENCLOSURES, CHASSIS, AND DRESS PLATES**

**CAB-BM Marine System:** Protects equipment in shipboard and waterfront applications. Also order **BB-MB** for systems using 100 AH batteries. For a full list of required and optional equipment, see DN-60688.

**NFS-LBB:** Battery Box (required for batteries larger than 26 AH).

**NFS-LBBR:** Same as above, but red.

**SEISKIT-320/B26:** Seismic mounting kit. Required for seismic-certified applications with NFS-320 and BB-26. Includes battery bracket for two 26 AH batteries.

**SEISKIT-BB25:** Seismic mounting kit for the BB-25. Includes battery bracket for two 26 AH batteries.

**SEISKIT-LBB:** Seismic kit for the NFS-LBB. Includes battery bracket for two 55 AH batteries.

#### **Backboxes**

NOTE: "C" suffix indicates ULC-Listed mode.

**ABF-1B** Annunciator Flush Box.

**ABF-1DB(C)** Annunciator Flush Box with Door.

**ABF-2B** Annunciator Flush Box

**ABF-2DB(C)** Annunciator Flush Box with Door

**ABF-4B** Annunciator Flush Box

**ABS-1TB(C)** Annunciator Surface Box

**ABS-1B(C)** Annunciator Surface Box

**ABS-2B** Annunciator Surface Box

**ABS-2D(C)** Annunciator Surface Box

**ABS-4D(C)** Annunciator Surface Box

**BB-UZC:** Backbox for housing the UZC-256. Required for NFS-320 applications. Black. For red, order BB-UZC-R.

#### **OTHER OPTIONS**

**CGW-MB:** CLSS Gateway for Internet/cloud-based communication between the FACP and peripheral devices. See HON-62034.

**HON-CGW-MBB:** CLSS Gateway, pre-installed in a cabinet. See HON-62034.

**411:** Slave Digital Alarm Communicator. See DN-6619.

**411UDAC:** Digital Alarm Communicator. See DN-6746.

**IPDACT-2/2UD, IPDACT Internet Monitoring Module:** Connects to primary and secondary DACT telephone output ports for internet communications over customer-provided Ethernet connection. Requires compatible Teldat VisorALARM Central Station Receiver. Can use DHCP or static IP. See DN-60408.

**IPSPLT:** Y-adaptor option allow connection of both panel dialer outputs to one IPDACT-2/2UD cable input.

**IPENC:** External enclosure for IPDACT, includes IPBRKT mounting bracket; Red. For Black order **IPENC-B**.

**HWF2V-COM:** LTE Digital Cellular Fire Alarm Communicator and Internet Panel, Verizon LTE / IP. Provides selectable configurable paths: cellular only, IP only, or IP primary with cellular backup. Connects to the primary and secondary ports of a DACT. See DH-62010. (For Canadian applications order IPGSM-4GC. See DH-60771.)

**HWF2A-COM:** LTE Digital Cellular Fire Alarm Communicator and Internet Panel, AT&T LTE / IP. Provides selectable configurable paths: cellular only, IP only, or IP primary with cellular backup. Connects to the primary and secondary ports of a DACT. (For Canadian applications order IPGSM-4GC. See DH-60771.)

**NFS-320-RB:** Replacement board with central processing unit (CPU). NOTE: Keypad must be removed before shipping old unit out for repair.

- NFS-320-RBE: Replacement CPU, Export.
- NFS-320-RB-PO: Replacement CPU, Portuguese.
- NFS-320-RB-POE: Replacement CPU, Export, Portuguese.
- NFS-320-RB-FR: Replacement CPU, Canadian French.
- NFS-320-RB-SP: Replacement CPU, Spanish.
- NFS-320-RB-SPE: Replacement CPU, Export, Spanish.

NOTE: For other options including compatibility with retrofit equipment, refer to the panel's installation manual, the SLC manual, and the Device Compatibility Document.

**SYSTEM CAPACITY**

- Intelligent Signaling Line Circuits ..... 1
- Intelligent detectors ..... 159
- Addressable monitor/control modules ..... 159
- Programmable internal hardware and output circuits ..... 4
- Programmable software zones ..... 99
- Special programming zones ..... 14
- LCD annunciators per NFS-320/-320E ..... 32
- ACS annunciators  
per NFS-320/-320E ..... 32 addresses x 64 points

**ELECTRICAL SPECIFICATIONS**

- Primary input power:
  - NFS-320: 120 VAC, 50/60 Hz, 5.0 A.
  - NFS-320E: 220/240 VAC, 50/60 Hz, 2.5 A.
- Current draw (standby/alarm):
  - NFS-320(E) board: 0.250 A. Add 0.035 A for each NAC in use.
  - KDM-R2 (Backlight on): 0.100 A.
- Total output 24 V power: 6.0 A in alarm.

**NOTE:** The power supply has a total of 6.0 A of available power. This is shared by all internal circuits. See Installation Manual for a complete current draw calculation sheet.

- Standard notification circuits (4): 1.5 A each.
- Resettable regulated 24V power: 1.25 A.
- Two non-resettable regulated 24V power outputs:
  - 1.25 A.
  - 0.50 A.
- Non-resettable 5V power: 0.15 A.
- Battery charger range: 18 AH – 200 AH. Use separate cabinet for batteries over 26 AH.
- Float rate: 27.6 V.

**CABINET SPECIFICATIONS**

NFS-320 cabinet dimensions:

- Backbox: 18.12 in. (46.025 cm) width; 18.12 in. (46.025 cm) height; 5.81 in. (14.76 cm) depth.
- Door: 18.187 in. (46.195 cm) width; 18.40 in. (46.736 cm) height; 0.75 in. (1.905 cm) depth.
- Trim ring: Molding width is 0.905 in. (2.299 cm).
- Shipping weight (without batteries): 36.15 lb. (16.4 kg).

**TEMPERATURE AND HUMIDITY RANGES**

This system meets NFPA requirements for operation at 0 – 49°C/32 – 120°F and at a relative humidity 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F). However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 – 27°C/60 – 80°F.

**AGENCY LISTINGS AND APPROVALS**

The listings and approvals below apply to the basic NFS-320 control panel. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL/ULC Listed:** S635.
- **FM Approved.**
- **CSFM:** 7165-0028:0243.
- **Fire Dept. of New York:** COA# 6212.
- **City of Chicago.**

**NOTE:** For additional information on NFS-320C, see DN-60085. For information on NFS-320SYS, see DN-60637.

**Marine Applications:** Marine approved systems must be configured using components itemized in this document. (See Main System Components, in “Product Line Information.) Specific connections and requirements for those components are described in the installation document, PN 54756. When these requirements are followed, systems are approved by the following agencies:

- **US Coast Guard** 161.002/50/0, 161.002/55/0 (Standard 46 CFR and 161.002).
- **Lloyd's Register** 11/600013 (ENV 3 category).
- **American Bureau of Shipping** (ABS) Type Approval.

**NOTE:** For information on marine applications, see DN-60688.

**STANDARDS**

The NFS-320 complies with the following UL Standards and NFPA 72, International Building Code (IBC), and California Building Code (CBC) Fire Alarm Systems requirements:

- **UL 864**, 10th edition (Control Units and Accessories for Fire Alarm Systems).
- **UL 2610** (Commercial Premises Security Alarm Units and Systems).
- **UL 2572** (Mass Notification Systems). (NFS-320 version 20 or higher).
- **ULC-S527-11** Standard for the Installation of Fire Alarm Systems.
- **LOCAL** (Automatic, Manual, Waterflow and Sprinkler Supervisory).
- **AUXILIARY** (Automatic, Manual and Waterflow) (requires TM-4).
- **REMOTE STATION** (Automatic, Manual, Waterflow and Sprinkler Supervisory) (requires TM-4).
- **PROPRIETARY** (Automatic, Manual, Waterflow and Sprinkler Supervisory). *Not applicable for FM.*
- **CENTRAL STATION** (Automatic, Manual, Waterflow and Sprinkler Supervisory) (requires DACT).
- **EMERGENCY VOICE/ALARM.**
- **OT, PSDN** (Other Technologies, Packet-switched Data Network).
- **IBC 2012, IBC 2009, IBC 2006, IBC 2003, IBC 2000** (Seismic).
- **CBC 2007** (Seismic).

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.



NOTIFIRE-NET™, ONYXWorks™, and SWIFT™ are all trademarks of and FlashScan®, NOTIFIER®, ONYX®, VeniFire® Tools, and VIEW® are all registered trademarks of Honeywell International Inc. ©2022 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

Country of Origin: USA

